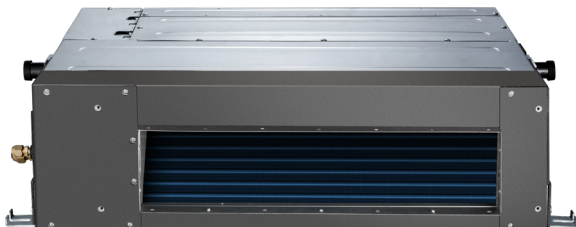


PREMIER SERIES**12,000 BTU****BZ33-DIDU12-P****FEATURES**

- Premier Series
- Single & multi-zone compatible
- 24-hour timer
- Auto restart function
- Flexible air intake
- Golden Fin anti-corrosive coating
- Variable static pressure control
- BZ33-WCON1 Wired controller included
- Compatible with BZ33-WCON2

SINGLE & MULTI-ZONE

The unit is compatible for either single or multiple zone applications.

FOLLOW ME MODE

Senses indoor temperature at handheld remote or Breeze33 wired controller, rather than at the indoor equipment.

GOLDEN FIN COATING

Prevents corrosive build-up and improves efficiency while protecting the condenser from harsh weather and elements.

AUTO DEFROST

In low temperatures, the auto defrost feature will keep the evaporator from freezing.

AUTO RESTART

In the event of a power failure, the unit will remember and restart the previous settings when power returns.

24-HOUR TIMER

Preset the unit to automatically turn on or off.



DUCTED SYSTEM

PREMIER SERIES

UNIT	ID NO.	MODEL
Indoor	.3473441	BZ33-DIDU12-P

PERFORMANCE

Nominal Cooling (Capacity)	BTU/H	12,000 (4,000 - 12,350)
Nominal Heating (Capacity)	BTU/H	12,000 (3,950 - 15,230)
SEER	BTU/W	20.5
EER	BTU/W	12.5
HSPF4	BTU/W	11.0
HSPF5	BTU/W	9.5

REFRIGERANT PIPING

Liquid	In	1/4
Gas	In	1/2

ROOM TEMPERATURE

Cooling/Heating	°F	62~90 / 32~86
-----------------	----	---------------

SPECIFICATIONS

Controller	Wired Remote
Warranty	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

INDOOR FAN MOTOR

Input	W	130.0
RLA	A	1.11
Speed (High/Med/Low)	r/min	1,170 / 1,030 / 850
Air Flow (High/Med/Low)	CFM	353 / 283 / 177
Noise Level (High/Med/Low)	dBA	38 / 26 / 33.5

INDOOR UNIT DIMENSIONS

Product (W x D x H)	In	27-1/2 x 17-7/10 x 7-9/10
Packaging (W x D x H)	In	33-9/10 x 21-1/4 x 10-4/5
Net/Gross Weight	Lbs	37.5 / 48.3

ELECTRICAL DATA

Min. Circuit Ampacity	A	1.3
Max. Fuse	A	15
Design Pressure	PSIG	550 / 340
Power Supply	Ph/V/Hz	1 / 208/230 / 60

