

4AC17L

FORM NO. 4AC17L-100 (11/2023)



COMPRESSOR

- High-efficiency scroll compressor
- R410A refrigerant
- Internally protected against high temperature motor overload conditions
- Heavy-duty compressor sound blanket for quiet operation (optional accessory)

CABINET

- Full metal louvered construction to protect the coil/hail protection
- Individual louver panels; 4 screws to remove for ease of coil cleaning and service
- Corner-mounted controls for easy service
- Baked polyester paint finished over galvanized steel for maximum durability
- 45-degree offset valves for easy service

COILS

- Omniguard™ total corrosion protection technology designed coil
- Enhanced tube-and-fin coil design featuring MHT™ Technology
- Lanced fins for maximum heat transfer
- Every coil factory tested for leakproof construction
- Raised coil prevents debris from impeding airflow

COMPONENTS

- Factory installed high and low pressure switches
- Thread-on pressure switches with Schrader core for simple, quick replacement
- Filter drier shipped loose for installation flexibility
- Fan orifice for smoother airflow and sound level reduction
- Charged for 15 feet of line set

WARRANTY

10 year limited warranty on compressor

10 year limited warranty on all parts, extended warranty available*

**Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty). Warranty must be registered online within 60 days of installation to qualify for 10-year coverage. Unregistered equipment defaults to 5-year coverage. See full warranty at www.alliedair.com for terms, conditions and exclusions.*

NOTE:


For the latest ratings, please visit
www.AHRIdirectory.org



4AC17L

17 SEER SPLIT SYSTEM AIR CONDITIONER

MODEL NUMBER GUIDE

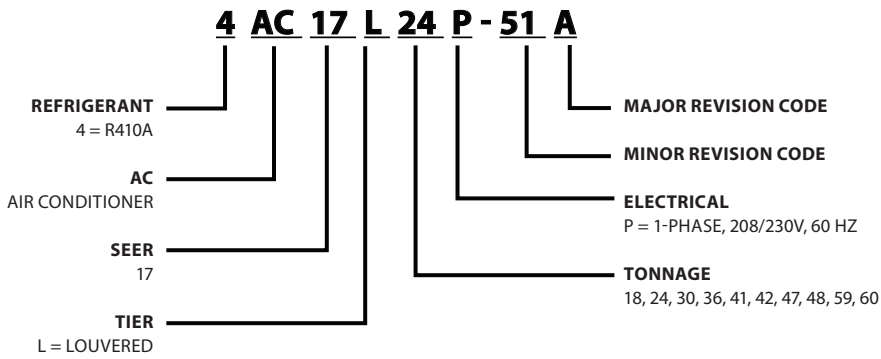


PHYSICAL AND ELECTRICAL DATA

Model	Voltage/Hz/Phase	Voltage Range	Min. Circuit Amp.	Max. Over Current Device (amps)	Compressor		Outdoor Fan Motor		
					Rated Load (amps)	Locked Rotor (amps)	Full Load (amps)	Rated HP	Nom. RPM
4AC17L18P	208-230/60/1	197-253	12.0	15	8.8	42.6	1.0	1/6	825
4AC17L24P	208-230/60/1	197-253	15.4	20	11.7	59.5	0.7	1/8	1075
4AC17L30P	208-230/60/1	197-253	18.4	25	14.1	71.3	0.7	1/8	1075
4AC17L36P	208-230/60/1	197-253	17.4	30	13.1	83.1	1.0	1/6	825
4AC17L42P	208-230/60/1	197-253	24.6	35	18.6	110.0	1.4	1/4	825
4AC17L48P	208-230/60/1	197-253	33.0	50	25.0	120.0	1.7	1/4	825
4AC17L60P	208-230/60/1	197-253	31.3	50	23.9	124.5	1.4	1/4	825

UNIT DIMENSIONS (IN.)

Model	Dimensions (inch)			Shipping Weight (Lbs.)
	A - Width	B - Depth	C - Height	
4AC17L18P	28.25	28.25	29.25	155
4AC17L24P	28.25	28.25	37.25	170
4AC17L30P	28.25	28.25	29.25	180
4AC17L36P	28.25	28.25	37.25	200
4AC17L42P	32.25	32.25	33.25	225
4AC17L48P	28.25	28.25	43.25	230
4AC17L60P	32.25	32.25	43.25	260

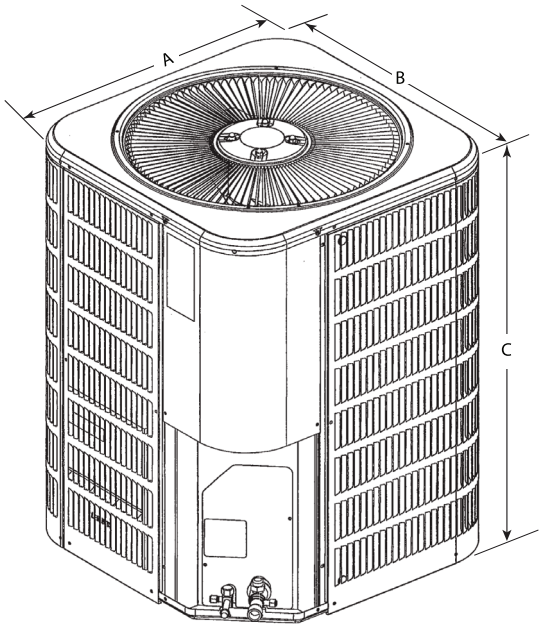

SOUND RATINGS

Model	Sound Power ¹	Estimated Sound Pressure (dBA) ²		
		Approximate Distance ³		
		3.3 Feet (1 Meter)	6.6 Feet (2 Meters)	9.8 Feet (3 Meters)
4AC17L18P	73	65	59	55
4AC17L24P	75	67	61	57
4AC17L30P	76	68	62	58
4AC17L36P	76	68	62	58
4AC17L42P	76	68	62	58
4AC17L48P	78	70	64	60
4AC17L60P	80	72	66	62

¹ Rated in accordance with AHRI standard 270 (2015). AHRI Standard 270 establishes a method of rating outdoor unitary equipment in terms of Sound Power.

² Rated in accordance with AHRI standard 275 (2018). AHRI Standard 275 provides the calculations for estimating the A-Weighted Sound Pressure at a given distance from the equipment. That is a more useful number because that is what humans will hear.

³ Based only on distance factor; other factors may change this value such as:

- Unit location (reflective surfaces adjacent to the unit)
- Barrier shielding sources
- Sound path/elevation
- Outside noise sources

REFRIGERATION DATA

Model	Refrig. Charge (oz.) *	Piston Size	TXV	Refrigerant Line Size		Outdoor Unit Connection		Indoor Unit Connection	
				Suction	Liquid	Suction	Liquid	Suction	Liquid
4AC17L18P	72	0.051	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4AC17L24P	82	0.059	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4AC17L30P	104	0.067	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4AC17L36P	136	0.072	H4TXV02	7/8	3/8	7/8	3/8	7/8	3/8
4AC17L42P	146	0.081	H4TXV02	7/8	3/8	7/8	3/8	7/8	3/8
4AC17L48P	152	0.084	H4TXV02	7/8	3/8	7/8	3/8	7/8	3/8
4AC17L60P	200	0.092	H4TXV03	1-1/8	3/8	1-1/8	3/8	7/8	3/8

*Factory charged for 15 feet of line set

** Adapter shipped with unit

† TXV only

COOLING PERFORMANCE WITH DTC¹

Outdoor Model	Indoor Model	Capacity (BTUH)	EER2	SEER2
4AC17L18P	EAC4X24B	17600	11.7	14.3
4AC17L24P	EAC4X30B	23200	11.7	14.3
4AC17L30P	EAC4X30B	28600	11.7	14.3
4AC17L36P	EAC4X36B	34200	11.7	14.3
4AC17L42P	EAC4X49C	41500	11.7	14.3
4AC17L48P	EAC4X60C	47000	11.2	13.8
4AC17L60P	EAC4X60C	57000	11.2	13.8

¹ DTC = Designated Tested Combination**NOTE:**

For the latest AHRI system matches
please visit www.AHRIdirectory.org