INDOOR/OUTDOOR
HYPER PRO MINI SPLIT SYSTEM

PREMIER SERIES

18,000 BTU

BZ33-HYP18WALL2-G2-P

BZ33-HYP18OUT2-G2-P

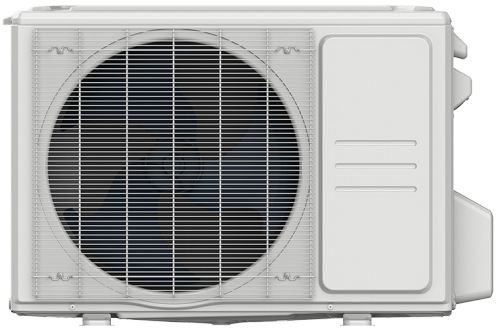

FEATURES

- Two-way draining
- Heating operation down to -22°F
- Low ambient cooling down to -22°F
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- 208/230V, single phase
- Compatible with BZ33-WCON1 and BZ33-WCON1-G2

TWO-WAY DRAINING

Piping, drainage, and connections are able to be installed on the right and left sides.

GOLDEN FIN COATING

Prevents corrosive build-up and improves efficiency while protecting the condenser from harsh weather and elements.

AUTO RESTART

In the event of a power failure, the unit will remember and restart the previous settings when power returns.

FOLLOW ME MODE

Senses indoor temperature at handheld remote or Breeze33 wired controller, rather than at the indoor equipment.

AUTO DEFROST

In low temperatures, the auto defrost feature will keep the evaporator from freezing.

24-HOUR TIMER

Preset the unit to automatically turn on or off.

All G2 models are backwards compatible excluding Air Handler units.

INDOOR/OUTDOOR
HYPER PRO MINI SPLIT SYSTEM

UNIT	ID NO.	MODEL
Indoor	.3548021	BZ33-HYP18WALL2-G2-P
Outdoor	.3548026	BZ33-HYP18OUT2-G2-P

SPECIFICATIONS

Series	Premier
Thermostat Type	Wireless Remote
Warranty	Yes*

COOLING

Capacity (Range)	BTU/H	18,000 (8,870 - 19,400)
Input	W	1,440
Rated Current	A	6.3
EER	BTU/W	12.5
SEER	BTU/W	21.5

HEATING

Capacity (Range)	BTU/H	18,000 (15,100 - 19,500)
Input	W	1,700
Rated Current	A	7.3
COP	W/W	3.1
HSPF4	BTU/W	13
HSPF5	BTU/W	11

COMPRESSOR

Type		Dual Rotary
Capacity	BTU/H	25,932 / 27,641
Input	W	2,045
Rated Current (RLA)	A	—
Refrigerant Oil/Charge	mL	—

REFRIGERANT PIPE

Design Pressure	PSIG	550 / 340
Refrigerant Type	Oz	R410A
Refrigerant Precharge	Ft	25
Additional Charge/Ft	Oz	0.16
Liquid	In	1/4
Gas	In	1/2
Max. Refrigerant Pipe Length	Ft	98
Max. Difference in Level	Ft	66

**5 year warranty on parts. 7 year warranty on compressor.*

OPERATING TEMPERATURE

Indoor (Cooling/Heating)	°F	60~90 / 32~86
Outdoor (Cooling/Heating)	°F	-22~122 / -22~86

INDOOR FAN MOTOR

Input	W	36
Output	W	—
RLA	A	0.44
Speed (High/Med/Low)	r/min	1,240 / 1,024 / 916
Air Flow (High/Med/Low)	CFM	523.5 / 376.5 / 305.9
Noise Level (High/Med/Low)	dBA	46 / 42 / 24

INDOOR UNIT DIMENSIONS

Product (W x D x H)	In	38 x 9-3/8 x 12-5/8
Packing (W x D x H)	In	41-1/8 x 15-3/4 x 12-7/8
Weight (Net/Gross)	Lbs	27.12 / 35.71

OUTDOOR FAN MOTOR

Input	W	—
Output	W	—
RLA	A	16
Speed	r/min	810 / 720
Air Flow	CFM	1,764.7
Noise Level	dBA	59

OUTDOOR UNIT DIMENSIONS

Product (W x D x H)	In	35 x 13-1/2 x 26-1/2
Packing (W x D x H)	In	39-3/16 x 15-11/16 x 29-1/8
Weight (Net/Gross)	Lbs	101 / 108.03

ELECTRICAL DATA

Min. Circuit Ampacity	A	16
Max. Fuse	A	25
Connection Wiring		14*4 AWG
Power Supply	Ph/V/Hz	1 / 208/230 / 60

INDOOR/OUTDOOR
HYPER PRO MINI SPLIT SYSTEM

WALL MOUNTS - COMFORT SERIES

Indoor Unit	HP09WALL1-G2-C*	HP12WALL1-G2-C*	HP18WALL2-G2-C*	HP24WALL2-G2-C*	HP30WALL2-G2-C*	HP36WALL2-G2-C*
Outdoor Unit (Single-Zone)	HP09OUT1-G2-C*	HP12OUT1-G2-C*	HP18OUT2-G2-C*	HP24OUT2-G2-C*	HP30OUT2-G2-C*	HP36OUT2-G2-C*

WALL MOUNTS - PREMIER SERIES

Indoor Unit	HYP06WALL2-G2-P	HYP09WALL2-G2-P*	HYP12WALL2-G2-P*	HYP18WALL2-G2-P*	HYP24WALL2-G2-P*	HYP30WALL2-G2-P	HYP36WALL2-G2-P
Outdoor Unit (Single-Zone)	HYP06OUT2-G2-P	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*		
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*						
	HP273Z2-G2-P*						
	HP364Z2-G2-P*						
	HP485Z2-G2-P*						
	HYP182Z2-G2-P*						
	HYP273Z2-G2-P*						
	HYP364Z2-G2-P*						
	HYP485Z2-G2-P*						

WALL MOUNT - PREMIER SERIES

Indoor Unit	HYP33WALL2-G2-P
Outdoor Unit (Single-Zone)	HYP33OUT2-G2-P

CEILING CASSETTES

Indoor Unit	CASS09-P	CASS12-P	CASS18-P	CASS24-G2-P*	CASS36-G2-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*				
	HP273Z2-G2-P*				
	HP364Z2-G2-P*				
	HP485Z2-G2-P*				
	HYP182Z2-G2-P*				
	HYP273Z2-G2-P*				
	HYP364Z2-G2-P*				
	HYP485Z2-G2-P*				

CEILING & FLOOR MOUNTS

Indoor Unit	IFMU18-P	IFMU24-G2-P	IFMU36-G2-P	IFMU48-G2-P
Outdoor Unit (Single-Zone)	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP273Z2-G2-P*			
	HP364Z2-G2-P*			
	HP485Z2-G2-P*			
	HYP273Z2-G2-P*			
	HYP364Z2-G2-P*			
	HYP485Z2-G2-P*			

DUCTED

Indoor Unit	DIDU9-P	DIDU12-P	DIDU18-P	DIDU24-P	DIDU36-P	DIDU48-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*					
	HP273Z2-G2-P*					
	HP364Z2-G2-P*					
	HP485Z2-G2-P*					
	HYP182Z2-G2-P*					
	HYP273Z2-G2-P*					
	HYP364Z2-G2-P*					
	HYP485Z2-G2-P*					

ONE-WAY CASSETTES

Indoor Unit	OWCASS09-G2-P	OWCASS12-G2-P	OWCASS18-G2-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*		
	HP273Z2-G2-P*		
	HP364Z2-G2-P*		
	HP485Z2-G2-P*		
	HYP182Z2-G2-P*		
	HYP273Z2-G2-P*		
	HYP364Z2-G2-P*		
	HYP485Z2-G2-P*		

AIR HANDLERS

Indoor Unit	MSAHU18-G2-P	MSAHU24-G2-P*	MSAHU36-G2-P	MSAHU48-G2-P
Outdoor Unit (Single-Zone)	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP273Z2-G2-P*			
	HP364Z2-G2-P*			
	HP485Z2-G2-P*			
	HYP273Z2-G2-P*			
	HYP364Z2-G2-P*			
	HYP485Z2-G2-P*			

CONSOLES

Indoor Unit	ICM12-G2-P
Outdoor Unit (Single-Zone)	HYP12OUT2-G2-P*
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*
	HP273Z2-G2-P*
	HP364Z2-G2-P*
	HP485Z2-G2-P*
	HYP182Z2-G2-P*
	HYP273Z2-G2-P*
	HYP364Z2-G2-P*
	HYP485Z2-G2-P*

*** Available in G1 and G2 models.**
All G2 models are backwards compatible excluding Air Handler units.