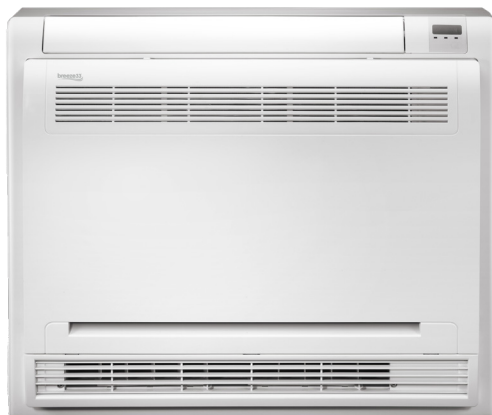


## PREMIER SERIES

**12,000 BTU****BZ33-ICM12-P**

### FEATURES

- Premier Series
- Single & multi-zone compatible
- 24-hour timer
- Auto restart function
- Golden Fin anti-corrosive coating
- Wireless remote control included
- Compatible with BZ33-WCON1

### SINGLE & MULTI-ZONE

The unit is compatible for either single or multiple zone applications.

### FOLLOW ME MODE

Senses indoor temperature at handheld remote or Breeze33 wired controller, rather than at the indoor equipment.

### GOLDEN FIN COATING

Prevents corrosive build-up and improves efficiency while protecting the condenser from harsh weather and elements.

### AUTO DEFROST

In low temperatures, the auto defrost feature will keep the evaporator from freezing.

### AUTO RESTART

In the event of a power failure, the unit will remember and restart the previous settings when power returns.

### 24-HOUR TIMER

Preset the unit to automatically turn on or off.

## PREMIER SERIES

UNIT	ID NO.	MODEL
Indoor	.3473446	BZ33-ICM12-P

### PERFORMANCE

Nominal Cooling (Capacity)	BTU/H	12,000 (3,600 - 12,600)
Nominal Heating (Capacity)	BTU/H	12,000 (3,800 - 13,500)
SEER	BTU/W	19.4
EER	BTU/W	12.5
HSPF4	BTU/W	10.5
HSPF5	BTU/W	9.2

### REFRIGERANT PIPING

Liquid	In	1/4
Gas	In	1/2

### ROOM TEMPERATURE

Cooling/Heating	°F	62~90 / 32~86
-----------------	----	---------------

### SPECIFICATIONS

Controller	Wireless Remote
Warranty	Yes*

\*5 year warranty on parts. 7 year warranty on compressor.

### INDOOR FAN MOTOR

Input	W	66.60
RLA	A	1.00
Speed (High/Med/Low)	r/min	810 / 680 / 530
Air Flow (High/Med/Low)	CFM	365 / 318 / 248
Noise Level (High/Med/Low)	dBA	45 / 41 / 35

### INDOOR UNIT DIMENSIONS

Product (W x D x H)	In	27-1/2 x 23-3/5 x 8-1/4
Packaging (W x D x H)	In	31-9/10 x 28 x 12
Net/Gross Weight	Lbs	32.41 / 42.77

### ELECTRICAL DATA

Min. Circuit Ampacity	A	1.3
Max. Fuse	A	15
Design Pressure	PSIG	550 / 340
Power Supply	Ph/V/Hz	1 / 208/230 / 60